


Thermal Imaging and Temperature Profiles for Continuous Process Monitoring and Quality Control

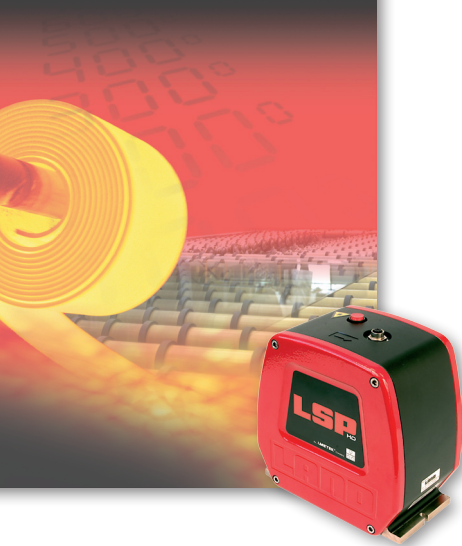

LSP_{HD} 20

200 to 850 °C / 392 to 1562 °F

LSP_{HD} 21

300 to 1000 °C / 572 to 1832 °F

LSP_{HD} 22

400 to 1200 °C / 752 to 2192 °F

Compact, high performance linescanners which provide high definition thermal imaging from a combination of fast scan speeds and high resolution optics. The real-time processed data is provided via an industrial ethernet connection which is plug and play, installed by means of a single cable connection, which reduces installation time and costs.

**+industry leading 150 Hz scan speed
1000 samples at all scan frequencies+**

Steel Applications - Key Benefits

- + Process Investigation**
Displays can be used to identify and analyse problems.
- + Process Development**
Process modelling to improve process control
- + Quality Control**
Accurate thermal records are a critical aspect of product quality information
- + Process Control**
Provide real time displays of the product's thermal images in a variety of different display formats.

Photos (Top to bottom): Hot Strip Mill - Cooling Section, Galvanising line

Key Applications - Steel

- + Continuous Annealing Lines**
Top of snout before zinc pot
- + Galvanising Lines**
- + Hot Strip Mill - Cooling Section**
- + Hot Plate Mill - Run-out Table**

LSP_{HD} - Key Features

- + High resolution, user focusable optical system**
- + Designed for operation in harsh industrial environments**
- + Plug and play installation via a single Ethernet cable connection**
- + Range of data output formats**



Performance Specifications LSP_{HD} 20 (P/No. 804798) / LSP_{HD} 21 (P/No. 804799) / LSP_{HD} 22 (P/No. 804800)


Temperature Range:	LSP_{HD} 20 200 to 850 °C / 392 to 1562 °F	LSP_{HD} 21 300 to 1000 °C / 572 to 1832 °F	LSP_{HD} 22 400 to 1200 °C / 752 to 2732 °F
Wavelength:	2.2 µm	1.9 µm	1.9 µm
Measurement Accuracy(1):	±2°C / 3.6°F		
Repeatability:	<0.5°C / <0.9°F		
Temp. Resolution typical:	≤1°C / ≤1.8°F		
Drift with ambient temp:	≤1° indicated / 10° ambient		
Emissivity:	0.20 to 1.00		
Speed of Response:	≤ 1.5 µs	≤ 1 µs	≤ 1 µs
Scan angle:	80° (software adjustable to 40°)		
Scan Speed:	10 to 150 Hz (User adjustable in 1 Hz steps)		
Samples/scan:	1000		
Field of View:	LSP _{HD} 20 - 300:1 with user focusable optics (smallest spot size Ø 2mm/0.08 in) <i>static to 95% radiance</i> LSP _{HD} 20 -1034:1 with user focusable optics (smallest spot size Ø 2mm/0.08 in) <i>static to 50% radiance</i>		
	LSP _{HD} 21&22 - 500:1 with user focusable optics (smallest spot size Ø 2mm/0.08 in) <i>static to 95% radiance</i> LSP _{HD} 21&22 - 1118:1 with user focusable optics (smallest spot size Ø 2mm/0.08 in) <i>static to 50% radiance</i>		
Focus Distance:	1m / 39.7 in to infinity (continuously adjustable by the user)		
Connection (signal/power):	Industrial Ethernet via M12 Connector / Power over Ethernet		
Signal Processing:	Up to 14 user configurable zones with min. / max. / average / quantile / average threshold		
Inputs/Outputs:	PoE (IEEE 802.3at) enabled TCP/IP Industrial Ethernet		
Ambient Temperature	5 to 60°C / 41 to 140°F (specified) 5 to 70°C / 41 to 158°F (operating)		
Dimensions (w x h x d):	206 x 209 x 100 mm / 8.1 x 8.2 x 3.9 inches		
Alignment Laser:	Class 2, maximum output 1.0 mW at 635 nm, IEC60825-1:2001 / Indicating scan plane & extent		
Environmental Sealing:	IP65		
EMC:	EN 61326 Class A; Low Voltage Directive EN61010-1		

Notes: (1) Applies 5 to 95% of range

LSP_{HD} Overview

A complete overview of the entire product range, including the key features and benefits of all models.

Ref **LSP_{HD} Overview 0310**

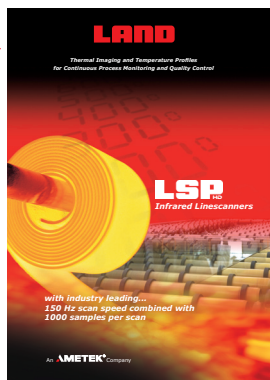

LSP_{HD} Mountings and Accessories

A complete overview of the entire range of mountings and accessories for the entire LSP_{HD} product range

Ref. **LSP_{HD} M&A 0310**



Land Instruments International Ltd • Dronfield S18 1DJ • England
Email: land.infrared@ametek.co.uk • www.landinst.com • Tel: +44 (0) 1246 417691 • Fax: +44 (0) 1246 410585

AMETEK Land, Inc. • 150 Freeport Rd • Pittsburgh, PA 15238 • U.S.A.
Email: irsales@ametek.com • www.ametek-land.com • Tel: +1 (412) 826 4444 • Fax: +1 (412) 826 4460

Non-Contact Temperature Measurement Solutions

For a full list of international offices, please visit www.landinst.com



An **AMETEK** Company

Applies in the UK

Applies in the USA