

PSL

PS Automation 
Gesellschaft für Antriebstechnik

We care for actuation.

Model 4

Completely revised: Increased reliability, durability and installation convenience

Sturdy aluminium support for board and accessories



Friction clutch prevents damage



Previous positioners and position transmitters still upgradeable

Vibration-proof potentiometer suspension



Simple and securely locked connection to the valve stem*


Precise valve setting:

- with fine adjustment of cams
- with stroke scale

Standard thread:
PSL 201–204 M12
PSL 208–214 M16

Other threads on request

*not for:
PSL 320/325




PSL


PS Automation 
Gesellschaft für Antriebstechnik

We care for actuation.


Model 4

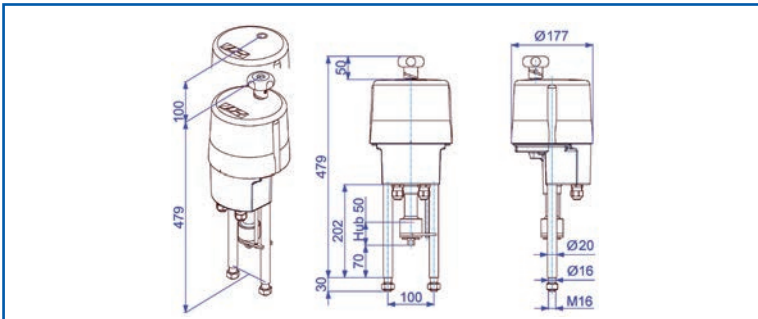


PSL 201-204	
Max. force	1 kN bis 4,5 kN
Actuator speed	0,25 bis 1,4 mm/s
Stroke	max. 50 mm

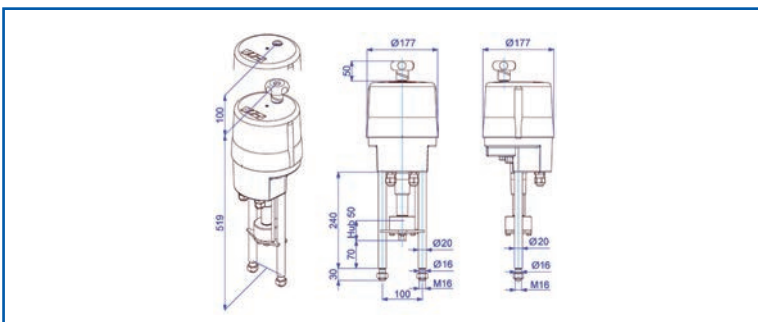

PSL 208-210	
Max. force	8 kN bis 10 kN
Actuator speed	0,35 bis 1,0 mm/s
Stroke	max. 50 mm

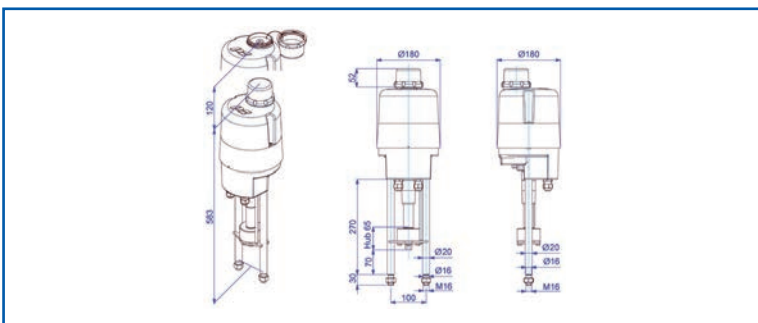

PSL 214	
Max. force	14 kN
Actuator speed	0,45 mm/s
Stroke	max. 65 mm

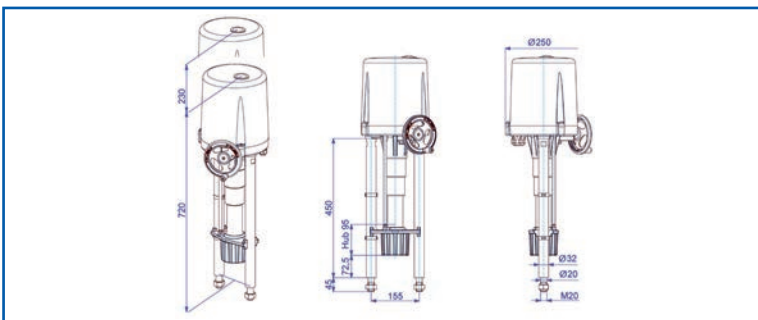

PSL 320-325	
Max. force	20 kN bis 25 kN
Actuator speed	1,0 mm/s
Stroke	max. 95 mm

PS Automation GmbH
Gesellschaft für Antriebstechnik

Philipp-Krämer-Ring 13 • D-67098 Bad Dürkheim
Tel.: +49 (0) 63 22-60 03-0 • Fax: +49 (0) 63 22-60 03-20
info@ps-automation.com • www.ps-automation.com

Engineered and Made in Germany



03/2012