



# Microlance

## insertion moisture meter

innovators in fluid measurement

**Hydramotion**

- ▶ instantaneous moisture and temperature
- ▶ robust practical design
- ▶ simple operation
- ▶ accurate on-site readings
- ▶ spot sample or heap average measurement

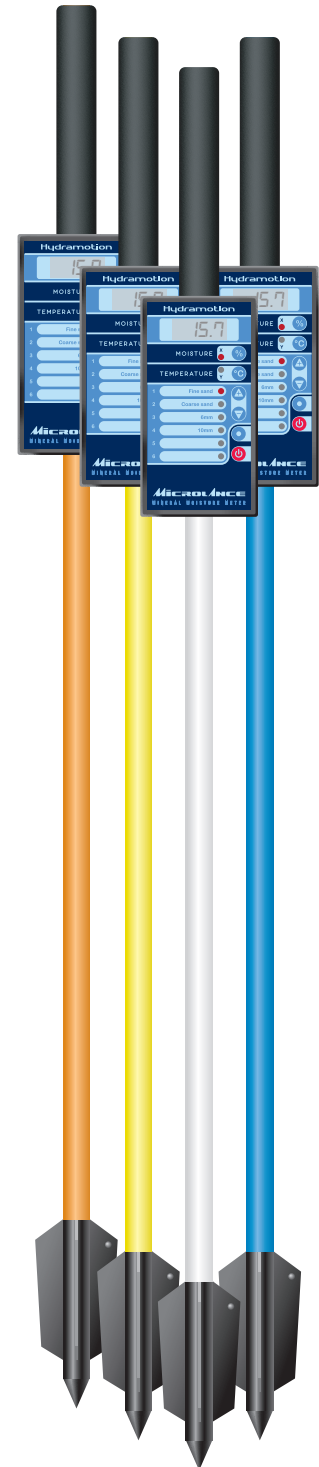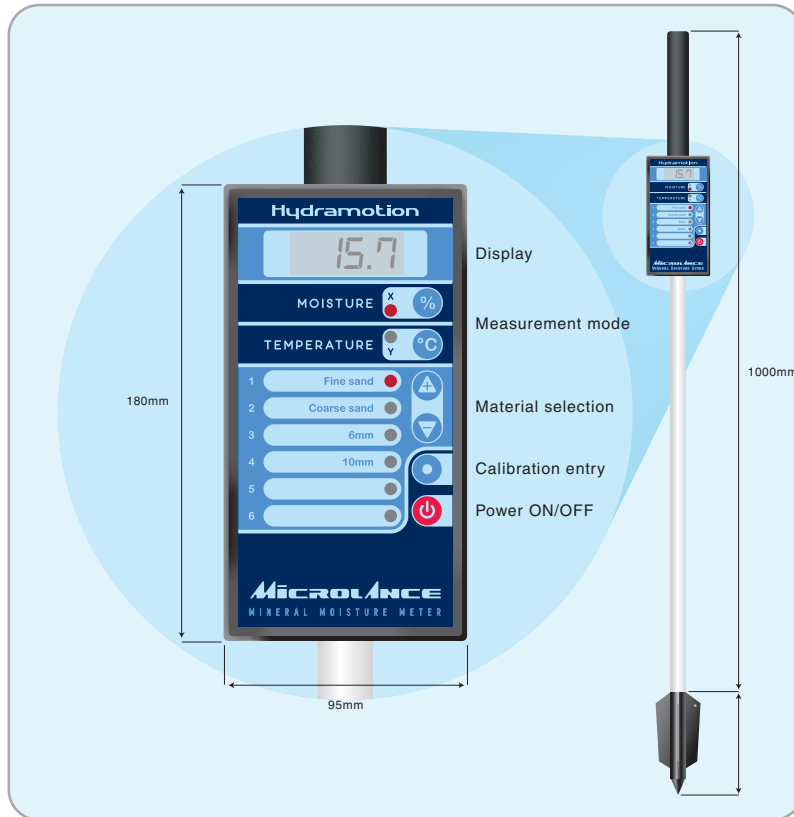

## SPECIFICATION

Measurement response	2 seconds
Moisture range	0-25%
Mositure resolution	±0.1%
Moisture accuracy	±0.5% of reading
Temperature range	-20°C to 60°C
Temperature resolution	0.1°C
Temperature accuracy	<0.5°C
Weight	1500g
Material selections	6 (user configurable)
Power requirements	4 x 1.5v AA alkaline cells (or equivalent)
Shaft colour options	Grey / Orange / Yellow / Blue

**Hydramotion Ltd** tel: +44 (0) 1653 600294  
 1 York Road Park, fax: +44 (0) 1653 693446  
 Malton, York, mail@hydramotion.com  
 England YO17 6VA [www.themicrolance.com](http://www.themicrolance.com)