


## FILTR TYPU Y

- #12 siatka
- 50 bar
- 1/4" (DN8) do 3" (DN80)
- $T_{max.} = 200\text{ }^{\circ}\text{C}$
- nie stosować dla gazów w instalacjach domowych



seria YS-800

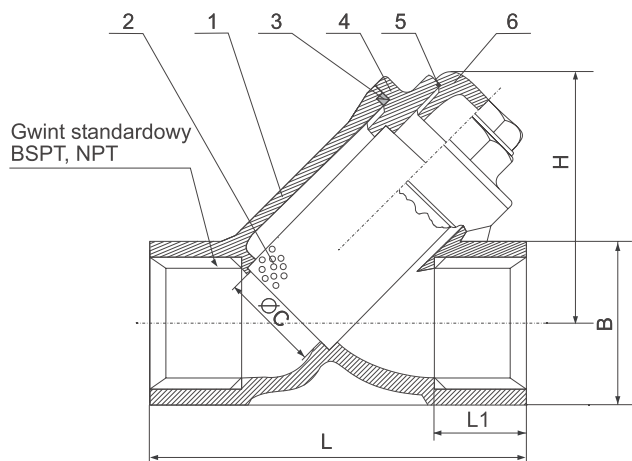

### Wymiary (mm) i waga:

Wielkość	B	ØC	H	L	L1	W (kg)
1/4"	23	11,0	46	65	13,5	0,24
3/8"	23	13,0	46	65	14,0	0,23
1/2"	26	15,0	46	65	15,0	0,23
3/4"	32	20,0	55	80	17,0	0,36
1"	41	25,0	70	90	19,0	0,70
1 1/4"	49	32,0	73	105	20,0	0,90
1 1/2"	56	40,0	81	120	22,0	1,20
2"	69	50,0	94	140	23,5	1,90
2 1/2"	87	65,0	120	170	29,0	4,3
3"	102	80,0	140	200	31,0	6,3

### Materiał:

Nr	Nazwa części	Materiał	Ilość
1	Korpus	ASTMA351 Gr. CF8M	1
2	Sito	SS 316, #12 SITO	1
3	Uszczelka	TEFLON (PTFE)	1
4	Pokrywa	ASTMA351 Gr. CF8M	1
5	Uszczelka	TEFLON (PTFE)	1
6	Korek	ASTMA351 Gr. CF8M	1